



BH-6 PR

TEST AND DRAIN VALVE WITH PRESSURE RELIEF ASSEMBLY


THE TEST AND DRAIN VALVE FOR USE AS SPECIAL TYPE DRAIN FITTING FOR FIRE PROTECTION SERVICE IN ACCORDANCE WITH STANDARD FOR INSTALLATION OF SPRINKLER SYSTEMS.

FEMALE NPT INLET AND OUTLET CAST BRASS VALVE

TEST AND DRAIN VALVE BH-6(615) , WITH ADDITIONAL FIELD ADJUSTABLE PRESSURE RELIEF VALVE (BH-60).

THREADED TO BS 21 or ANSI B1.20.1

UL AND FM APPROVED

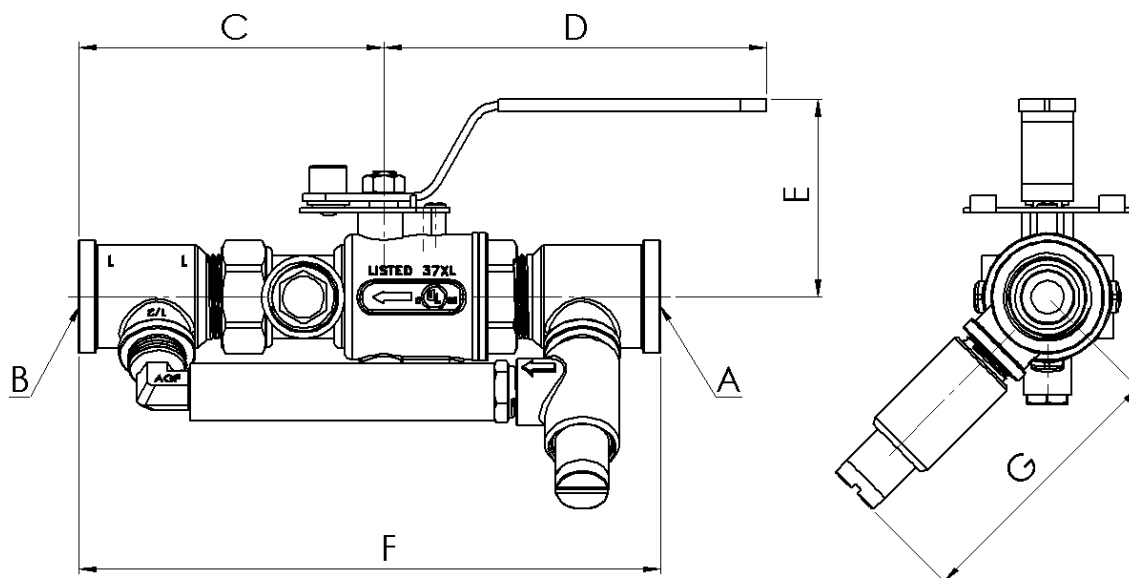

SIZE	APPROVED	A INLET	B OUTLET	C	D	E	F	G
1"	FM UL	1"NPT	1"NPT	118mm	148mm	76mm	225.8mm	106mm
1-1/4"	FM UL	1-1/4"NPT	1-1/4"NPT	68.3mm	160.5mm	68mm	236mm	111mm