




## 90° Double Clapper Two Way Inlets

### BH- 40(B87)

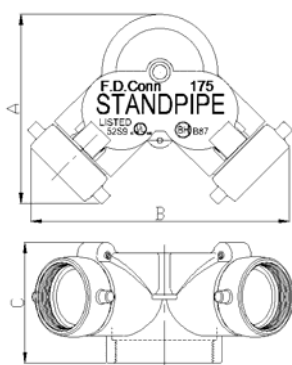


An exposed auxiliary inlet connection with 500G.P.M inlet capacity to supplement fire protection water supply. Exposed design provides an economical method of satisfying Fire Dept. inlet requirements.

#### Standard equipment:

Cast brass two-way inlet body only with double drop clapper and pin or rocker lug hose thread swivel ; angle NPT outlet connection.

#### Optional Finishes:

RB-Rough Brass  
PB-Polished Brass  
RC-Rough Brass Plated  
PC-Polished Chrome Plated




CERTIFICATIONS	a	b
UL FM	4"	2½"

	4" x 2½"
A	8.5"
B	11.6"
C	5.45"

## Straight Double Clapper Two Way Inlets

### BH- 41(B88)

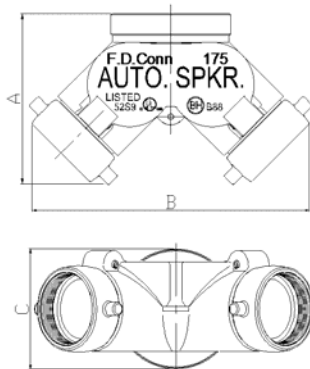

An exposed auxiliary inlet connection with 500G.P.M inlet capacity to supplement fire protection water supply. Exposed design provides an economical method of satisfying Fire Dept. inlet requirements.

#### Standard equipment:

Cast brass two-way inlet body only with double drop clapper and pin or rocker lug hose thread swivel ; straight NPT outlet connection.

#### Optional Finishes:

RB-Rough Brass  
PB-Polished Brass  
RC-Rough Brass Plated  
PC-Polished Chrome Plated



CERTIFICATIONS	a	b
UL FM	4"	2½"

	4" x 2½"
A	8.5"
B	11.6"
C	5"

#### Mark:

BH-41 "AUTO SPKR"  
BH-41A "STANDPIPE"